


# PHILIPS

## Xitanium

### LED driver

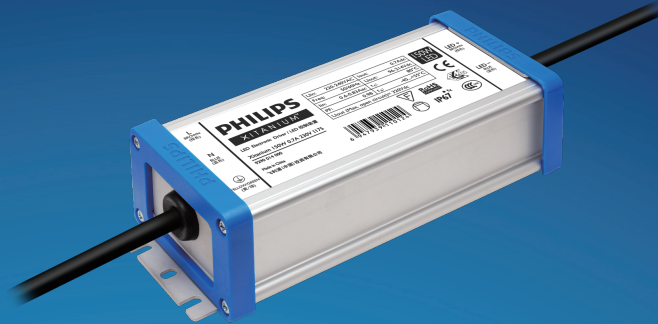

## Datasheet

# Xitanium 150W 0.7A 230V I175

LED-based light sources are an excellent solution for outdoor environment. They are long-lasting and require low maintenance. However, to get the best out of the LEDs, these light sources require highly reliable and efficient LED Drivers. The new Philips XitaniumFixed Output and Dimmable (1-10V) LED Outdoor Drivers are specifically designed to deliver reliable performance and protection while meeting the strict performance, approbation and application requirements.

### Benefits

#### Reliability

- Robust design; capable of withstanding harsh outdoor conditions.
- Long lifetime and high survival rate.
- Superior thermal management suitable for outdoor application.
- Backed by 5 year warranty from a company you can trust.
- Consistent waterproof performance through the lifecycle.

#### Affordable

- Component integration in advanced IC enables cost effective design.
- Proven robustness & reliability secure the lowest luminaire maintenance over time.

#### Easy to use

- Extreme compact size, fitting with varied luminaires.
- Easy to design-in based on the good thermal management and extra EMI margin

### Features

- Proven robustness and reliable electronic driver design.
- Achieving highest efficiencies based on advance technology.
- Long lifetime; 50k hrs@Tc max.
- Extreme compact size, fitting with varied and critical luminaires.
- Suitable for Class I isolated luminaires.
- Authorized certificate: ENEC, CB, CE and CCC.

### Applications

- Road and street lighting
- Area and flood lighting
- Tunnel lighting
- High-bay lighting

## Electrical input data

Specification item	Value	Unit	Condition
Nominal Input Voltage	220...240	V <sub>ac</sub>	
Input Voltage AC	202...254	V <sub>ac</sub>	Performance range
Operation Voltage AC	110...305	V <sub>ac</sub>	Safety operation
Nominal Input Frequency	50...60	Hz	
Input Frequency AC	47...63	Hz	Maximum permissible range
Nominal Input Current	0.77...0.71	A	220V...240V at full load
Maximum Input Current	0.83	A	At 202V
Nominal Input Power	165	W	At 230V at full load
Power Factor	≥0.95		At 230V at full load
Total Harmonic Distortion	≤10	%	At 230V at full load
Efficiency	93	%	@rated output power @rated input voltage @max. U <sub>out</sub>

## Electrical Output data


Specification item	Value	Unit	Condition
Regulation Method	Constant Current		
Output Voltage	96...214	V <sub>dc</sub>	
Output Voltage Max	320	V <sub>dc</sub>	Peak voltage at open circuit
Output Current	700	mA	Performance range
Output Current Tolerance	±5	%	At max. output current, T <sub>a</sub> =25°C (cold start)
Output Current Ripple <sub>LF</sub>	5	%	Ripple = peak / average, at <1kHz
Output Power	150	W	At full load
Output P <sub>stLM</sub>	≤ 0.05		In entire operating window
Output SVM	≤ 0.15		In entire operating window
Galvanic Isolation	Yes		Basic; 2U+1000V

## Electrical data controls input

Specification item	Value	Unit	Condition
Control Method	N/A	V	
Digital Interface	N/A		According 2.0 specifications
MainsControl	N/A		Can be configured via MultiOne
Time-based Integrated Control	N/A		Can be configured via MultiOne
Dimming Range	N/A	%	

## Wiring & Connections

Specification item	Value	Unit	Condition
Input Wire Size	1.0	mm <sup>2</sup>	3-wire cable; 300V/500V rating or higher
Output Wire Size	1.0	mm <sup>2</sup>	2-wire cable; 300V/500V rating or higher
Input& Output Wire Length	450 ±30	mm	Out of enclosure
Control Wire Size	N/A	mm	N/A
Control Wire Length	N/A	mm	

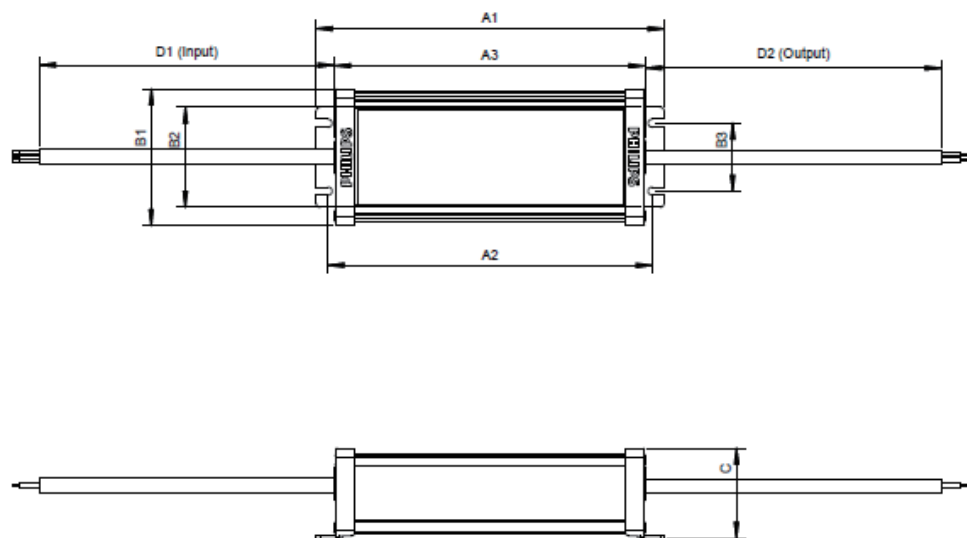

Data Sheet	
Item	Dimensions
A1	175
A2	162
A3	155
B1	68.2
B2	50
B3	34
C	45
D1	450
D2	450

## CE Isolation

Basic Isolation: 2U+1000 V	Input Wires	Output Wires	Chassis
Input Wires	N/A	Basic	Basic
Output Wires	Basic	N/A	Basic
Chassis	Basic	Basic	N/A

## Operational Temperature and Humidity

Specification item	Value	Unit	Condition
Ambient Temperature	-40...+55	°C	
T <sub>case</sub> Maximum	80	°C	Measured at T <sub>c</sub> -point
T <sub>case</sub> Life	70	°C	Measured at T <sub>c</sub> -point
T <sub>case</sub> Cut-Off	85	°C	Power to LEDs is reduced

## Storage Temperature and Humidity

Specification item	Value	Unit	Condition
Ambient Temperature	-40...+55	°C	Programmable Features

## Lifetime

Specification item	Value	Unit	Condition
Lifetime	100,000	Hours	At T <sub>case</sub> Life; Survival rate = 90%

## Programmable Features

Specification item	Value	Remark	Condition
Adjustable Output Current (AOC)	N/A	Default Output Current = xxx mA	See Design-In Guide
LED Module Temperature Derating(MTP)	N/A		
Constant Lumen Output (CLO)	N/A		
DC Emergency Dimming (DCEmDIM)	N/A		
Corridor Mode	N/A		
Energy Metering	N/A		
Diagnostics	N/A		

## Features


Specification item	Value	Remark	Condition
Over Temperature Protection	Yes	Dim Down	Automatic Recovery
Open Circuit Protection	Yes		Automatic Recovery
Short Circuit Protection	Yes		Automatic Recovery
Over Power Protection	Yes		
Hot Wiring	N/A		
Suitable for fixtures with Protection Class	Class I		

## Certificates and Standards

Specification item	Value
Approval Marks	CE / CCC / ENEC/ CB
Ingress Protection Rating	IP67

## Inrush current

Specification item	Value	Unit	Condition
Inrush Current I <sub>peak</sub>	46	A	At 230Vac
Inrush Current T <sub>width</sub>	440	μs	At 230Vac, measured at 50% I <sub>peak</sub>
Drivers per MCB 16A Type B	≤6	pcs	

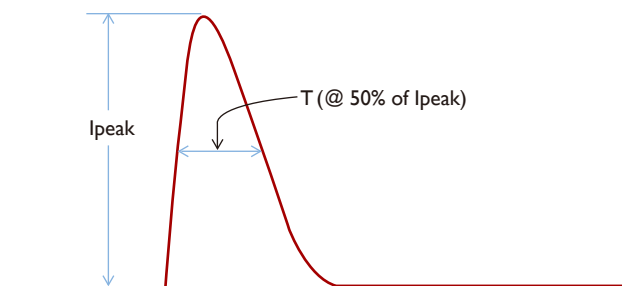

## Earth LeakageCurrent

Specification item	Value	Unit	Condition
ATypical Touch Current	≤0.7	mA <sub>pk</sub>	Meets IEC60598; LED module not included

## Surge Capability

Specification item	Value	Unit	Condition
Mains Surge Capability Differential Mode	4	KV	L-N, 20Ω
Mains Surge Capability Common Mode	4	KV	L/N-GND, 120Ω

## Wiring & Connections


Specification item	Value	Unit	Condition
Length overall	175	mm	
Width overall	68	mm	
Height overall	45	mm	
Mounting Holes Distance	162	mm	
Mounting Holes Width	34	mm	
Mounting Holes Size	5	mm	ForM4 with max head diameter of 10mm
Weight	730	g	

## Surge Capability


Specification item	Value
Product Name	Xitanium 150W 0.7A 230V I175
Logistics Code 12NC	9290 014 00080
Pieces per Box	10

## Graphs


### Operating window

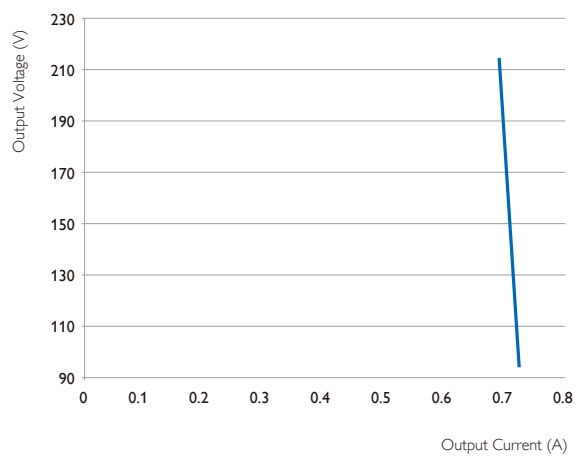


### Efficiency versus output power

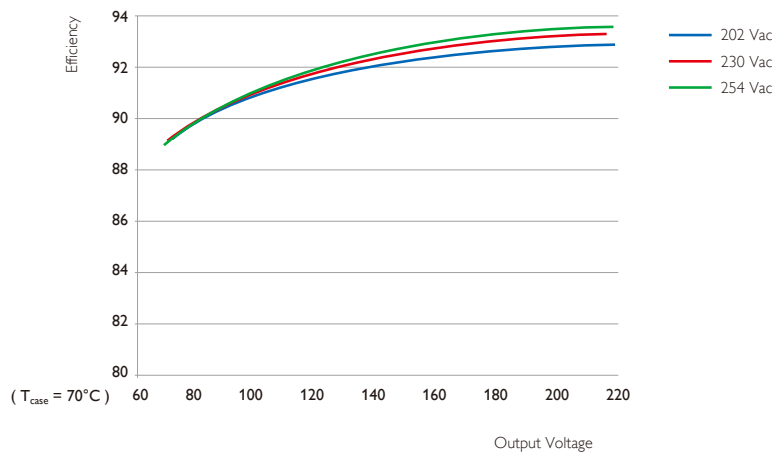


### Power factor versus output power

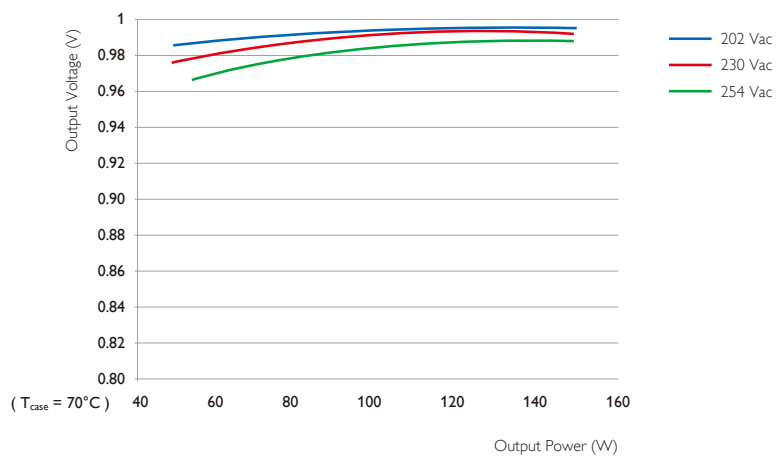

## Total Harmonic Distortion (T<sub>case</sub> = 70°C)

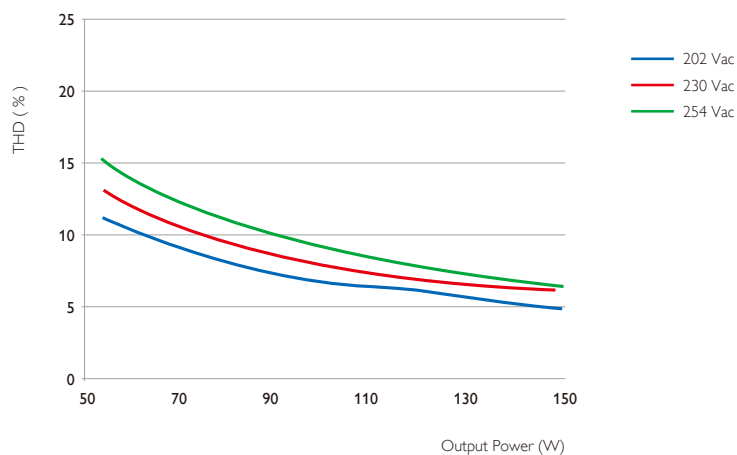

## Lifetime vs T<sub>case</sub>

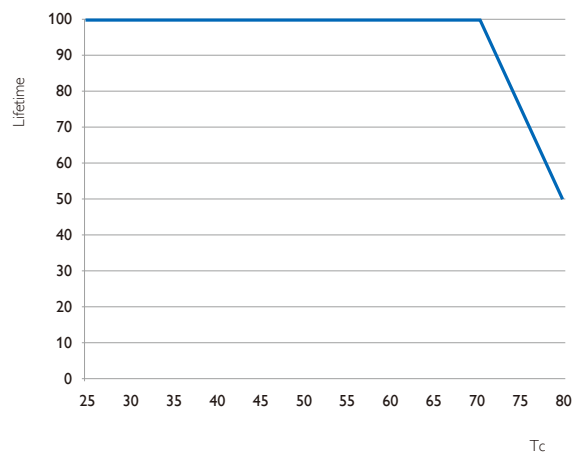

©2021 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: August 16, 2021

[www.philips.com/oem](http://www.philips.com/oem)